

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 July 2005 (14.07.2005)


PCT

(10) International Publication Number
WO 2005/064188 A1

- (51) International Patent Classification⁷: **F16D 55/00**, 69/04, 65/095
- (21) International Application Number: PCT/IT2003/000870
- (22) International Filing Date: 30 December 2003 (30.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (*for all designated States except US*): **FRENI BREMBO S.P.A.** [IT/IT]; Via Brembo, 25, I-24035 Curno (IT).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **SCHORN, Michael** [DE/IT]; Viale Grigna, 16, I-20050 Camparada (IT). **TIRONI, Giovanni, Mario** [IT/IT]; Via C. Fanzago, 16, I-24044 Dalmine (IT). **ONGARETTI, Enrico, Battista** [IT/IT]; Via Adua, 6, I-24040 Stezzano (IT). **SALA, Paolo** [IT/IT]; Via Case Nuove, 10, I-24030 Villa D'Adda (IT).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility model), PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: BRAKE PAD AND CALIPER FOR A DISC BRAKE

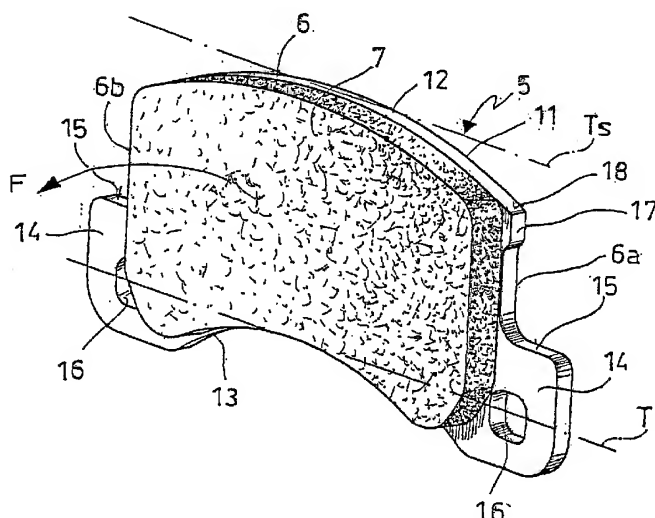

(57) Abstract: A brake pad (5) for a disc brake (1) that can be associated with a caliper (2) with thrust means (9a, 9b, 9c) for clamping the brake pad (5) with friction against a braking band (4) of a brake disc (41), wherein the brake pad (5) comprises: a plate (6) with a central portion (11) provided with a layer of friction material (7), said central portion (11) having an upper edge (12) and an opposed lower edge (13) and also two lateral edges (6a, 6b) and two support appendages (14) which extend from said lateral edges (6a, 6b) of the central portion (11), each of said support appendages (14) bounding an eye (16) capable of receiving a pin (27) of the caliper (2). The upper edge (12) and lower edge (13) extend substantially along circumferences of a circle imparting an arcuate shape to the central portion (11), and said support appendages (14) are disposed substantially at the height of said lower edge (13) of the brake pad (5).



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.